




# CFAST card

Targeted Product Portfolio, Engineered Specifically for Your Mission Critical Applications

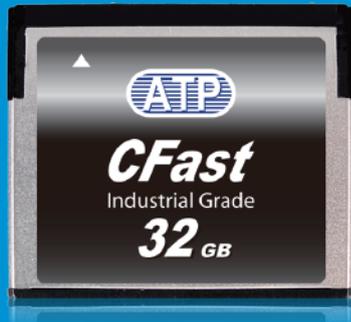

### Key Features

- Advanced wear leveling algorithm
- Bad block management
- AutoRefresh technology
- Power Loss Protection
- S.M.A.R.T support

ATP CFAST cards combine the convenient and trusted format of CompactFlash with the speed, capacity and performance of SATA III, while maintaining backward compatibility with other SATA versions.

They are recommended as boot and storage devices in embedded and industrial applications such as avionics/aerospace, automation, marine navigation, telecommunication/networking and medical equipment where mission-critical data requires the highest level of reliability, durability and data integrity.

Special features and technologies include: optional Power Loss Protection, which provides a hardware-based backup power circuit and/or firmware-based solution during a power failure; Advanced Wear Leveling for higher endurance and longer product life span; ECC (error correction code) and AutoRefresh technologies, which correct and monitor the error bit levels to ensure data integrity in frequently read areas, and S.M.A.R.T. (Self-Monitoring, Analysis, and Reporting Technology) function for easy monitoring of various device health parameters to help predict storage failure for preventive action.

Technologies & Add-On Services	S.M.A.R.T.	Hardware-based Power Loss Protection	AutoRefresh	Advanced Wear Leveling	Dynamic Data Refresh	Secure Erase	Industrial Temperature	Anti-Sulfur Resistors	Conformal Coating
Premium	○	○	○	○	○	○	○	▲	▲

▲: Customization option available on a project basis.

## Specifications

CFast Card	
Product Line	Premium
	A800Pi
Interface	SATA III 6 Gb/s
Flash Type	SLC
Form Factor	CFast Type I
Operating Temperature	-40 °C to 85 °C
Power Loss Protection Options	Hardware + Firmware Based
Optional SED Features	-
Capacity	8 GB to 32 GB
Performance	
Sequential Read (MB/s) up to	500
Sequential Write (MB/s) up to	300
Random Reads IOPS (4K, QD32) up to	35,800
Random Writes IOPS (4K, QD32) up to	-
Endurance and Reliability	
Endurance (TBW) <sup>1</sup> up to	2,667 TB
Reliability MTBF @ 25 °C	>2,000,000 hours
Reliability Number of Insertions	10,000 minimum
Others	
Dimensions: L x W x H (mm)	36.4 x 42.8 x 3.6
Certifications	CE, FCC
Warranty	5 years

<sup>1</sup> Under highest Sequential write value. May vary by density, configuration and applications.

Product spec and its related information are subject to change without advance notice.  
Please refer to [www.atpinc.com](http://www.atpinc.com) for latest information

v1.0 202201

© Copyright 2022 ATP Electronics, Inc. All rights reserved.



The Global Leader in Specialized Storage and Memory Solutions

# WE BUILD WITH YOU

ATP TAIWAN (HQ)

TEL: +886-2-2659-6368  
sales-apac@atpinc.com

ATP USA

TEL: +1-408-732-5000  
sales@atpinc.com

ATP EUROPE

TEL: +49-89-374-9999-0  
sales-europe@atpinc.com

ATP JAPAN

TEL: +81-3-6260-0797  
sales-japan@atpinc.com

ATP CHINA

TEL: +86-21-5080-2220  
sales@cn.atpinc.com