



EMPS-3401 mPCIe to four SATA III Module

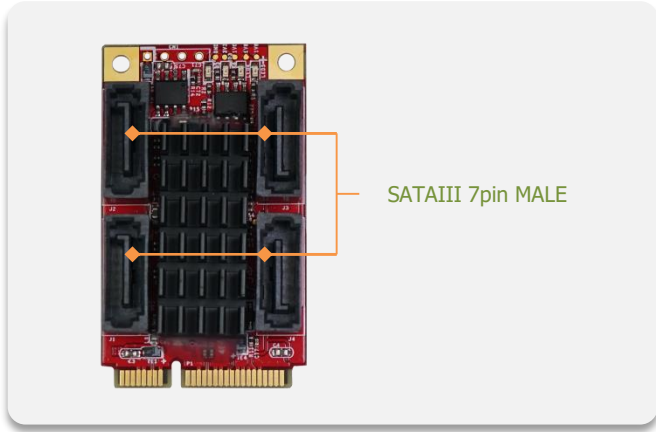

Features

- mPCIe to four SATA III ports.
- Supports AHCI, Port-Multiplier.
- Supports Native Command Queuing
- Supports error reporting, recovery and correction.
- Optional Industrial Temperature (-40°C to +85°C) support
- 30μ golden finger, 3 years warranty.
- Industrial design, manufactured in innodisk Taiwan

Mechanical Drawing

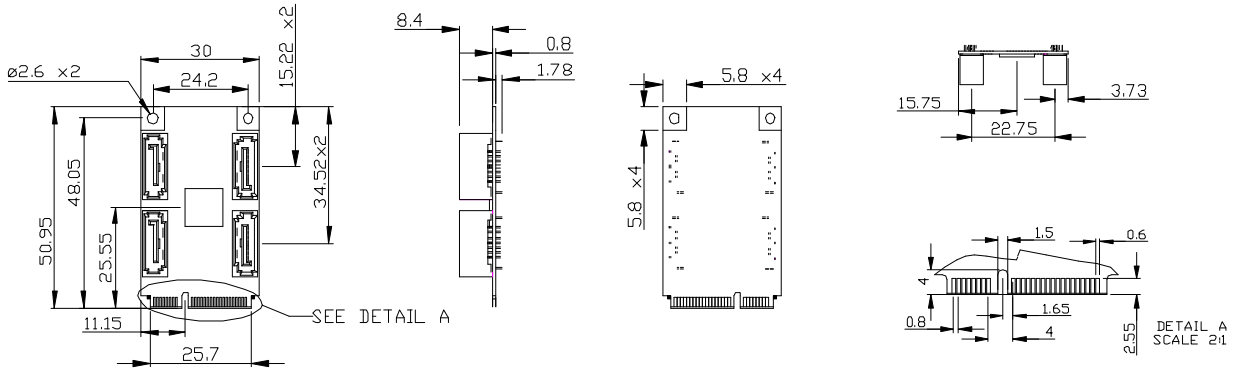

Specifications

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA

usasales@innodisk.com
+1-510-770-9421

Europe

esusales@innodisk.com
+31-40-3045-400

Japan

jpsales@innodisk.com
+81-3-6667-0161

China

sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2020 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

May 29, 2020

Form-Factor	mPCIe
Input I/F	PCI Express 2.0
Output I/F	SATA III
Output Connector	SATA 7pin x 4
Bridge	Marvell 88SE9215
TDP	2.74W (3.3V x 830mA)
Dimension (WxLxH)	30 x 50.9 x 10.9 mm, Weight: 8.5g
Temperature	Operation: -40~85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	

Order information

EMPS-3401-W1(Wide Temp.)
mPCIe to four SATA III Module, WT.